

Divvy

Click on image to order memo sample.

PERFORMANCE FABRIC


Grade 10



65835 Wired



65836 Glow

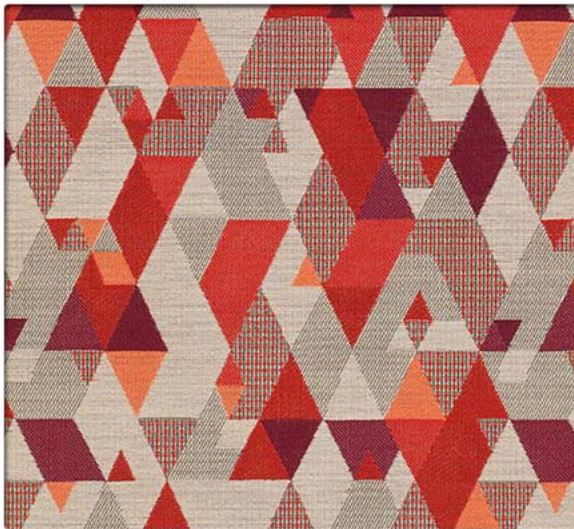

65837 Sangria



65842 Seaport



65839 Tranquil



65840 Crisp

Divvy

Click on image to order memo sample.

PERFORMANCE FABRIC

Grade 10



65841 Energy



65838 Moroccan

Divvy

All in the Details

PERFORMANCE FABRIC

Grade 10

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Contains an antimicrobial agent
- Bleach-solution cleanable

Environmental

- GREENGUARD Gold Certified
- LBC Red List Free
- Recycled content
- Non PFOA Stain Resistance
- No added flame retardants
- No added antimicrobials

Cleaning and Maintenance

Cleaning Code: **(W)** Clean with water-based foam or water-based cleaners only. Do not use solvents. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications

Content	61% Post Consumer Recycled Polyester, 25% Polyester, 14% Nylon
Finish	Crypton® Non-PFOA Soil & Stain Protection
Backing	Crypton® Fluid Barrier
Weight	22.08 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Repeat	Horizontal: 7.5 inches, Vertical: 12.0 inches, directional
Roll Size	55 yards

Performance Characteristics

Abrasion Resistance** ASTM D-4157	Exceeds 102,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 225 lbs. min., Fill: 472 lbs. min.
Tear Strength ASTM D-2261	Warp: 24 lbs. min., Fill: 53 lbs. min.
Seam Slippage ASTM D-4034	Warp: 86 lbs. min., Fill: 126 lbs. min.
Brush Pilling ASTM D-3511	Class 3.0 min.
Colorfastness to Light AATCC-16	40 Hours, Class 4.0
Crocking AATCC-8	Dry: Class 5.0, Wet: Class 4.5
Fluid Barrier	Crypton® Integrated Fluid Barrier
Antimicrobial	Crypton® fabric protection features silver ion technology which inhibits the growth of microbes on the protected surface.

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1



This product is produced using 61% recycled fiber.

Stinson®

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279

F 248 299 3884

cfstinson.com