

# Fiberdrill


NON PVC SEATING

Grade 5

Click on image to order memo sample.



FIB50 Shimmer

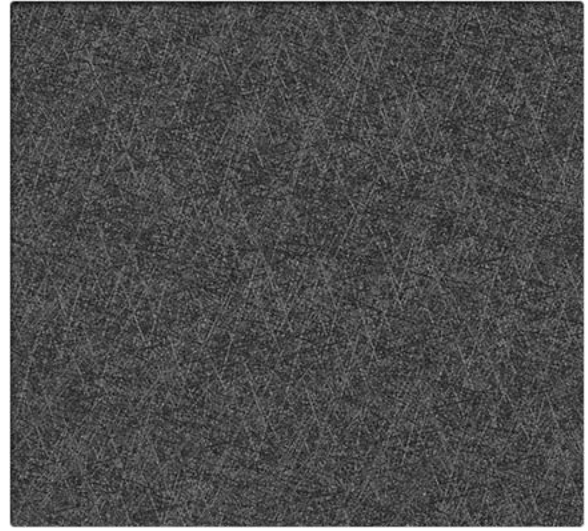

FIB64 Black Ice



FIB52 Elm



FIB53 Praline



FIB54 Spearmint



FIB55 Cinnamon

Click on image to order memo sample.



FIB56 Storm



FIB57 Honey



FIB58 Infinity



FIB59 Acorn



FIB60 Graphite



FIB61 Fava

Click on image to order memo sample.



FIB62 Classic



FIB63 Cocoa



FIB51 Breeze

## Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluid barrier
- Bleach-solution cleanable
- Enhanced fade resistance

## Environmental

- GREENGUARD Certified
- REACH Compliant
- RoHS Compliant
- Healthier Hospitals Compliant
- No added flame retardants
- No added antimicrobials
- Does not contain PVC
- Does not contain formaldehyde
- Does not contain plasticizers
- Formulated without Phthalates

## Cleaning and Maintenance

Cleaning Code: **(W)** Clean with water-based foam or water-based cleaners only. Do not use solvents. We recommend using a professional cleaning service.

Bleach solutions of up to 20% may be used for more difficult stains.

Dye lots may vary slightly.

\* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

\*\* Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

## Specifications



Content	Polyurethane made with Polycarbonate Resins
Finish	Advanced Soil and Stain Resistant Top Coat
Backing	Polyester Fabric
Weight	20.25 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	30 yards

## Performance Characteristics

Abrasion Resistance** CFFA-1	Exceeds 300,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 112 lbs. min., Fill: 192 lbs. min.
Tear Strength CFFA-16	Warp: 4 lbs. min., Fill: 4 lbs. min.
Seam Slippage ASTM D-751-06	Warp: 70.3 lbs. min., Fill: 66.2 lbs. min.
Colorfastness to Light AATCC-16	200 Hours, Class 4.5
Crocking CFFA-7	Dry: Class 4.0, Wet: Class 4.0
Fluid Barrier	Inherent Fluid Barrier
Hydrolytic Stability ISO 1419 (Tropical Test Method C)	Passes a minimum of 15 weeks; making it suitable for high traffic commercial environments.

## Flammability\*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1



This product is Non PVC.



# Stinson®

C.F. Stinson, LLC  
2849 Product Drive  
Rochester Hills, MI 48309

P 800 841 6279  
F 248 299 3884

cfstinson.com