


Click on image to order memo sample.




66140 Cream

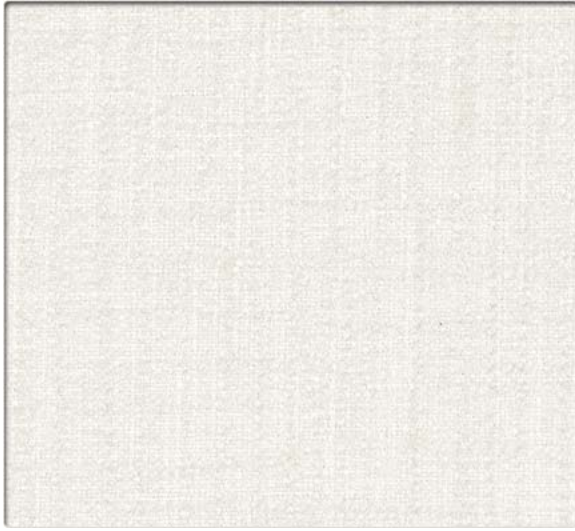


66164 Pirate



66142 Gourd

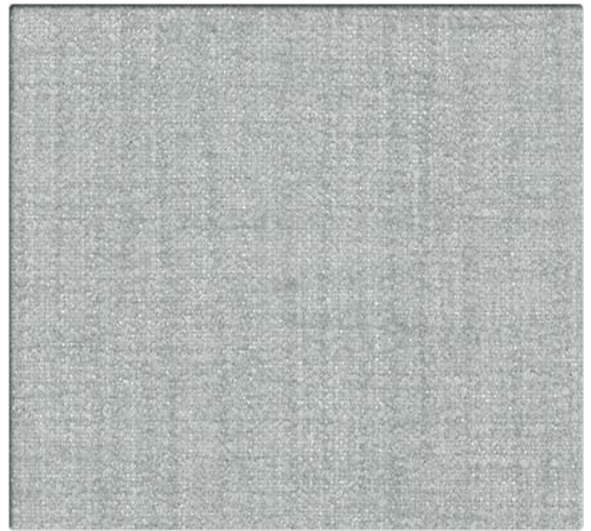

66143 Tranquil

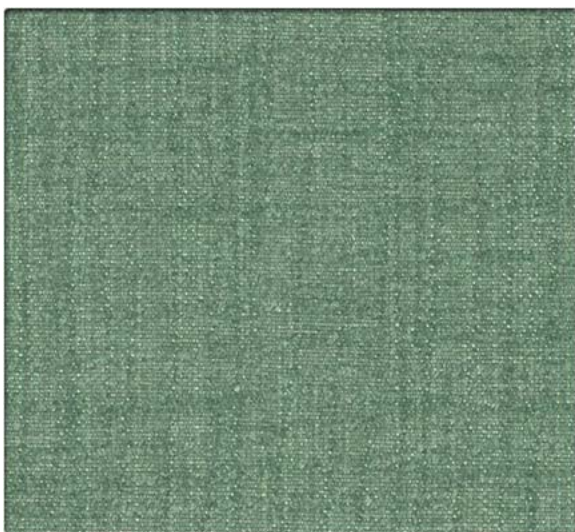


66144 Agave



66145 Melon


Click on image to order memo sample.

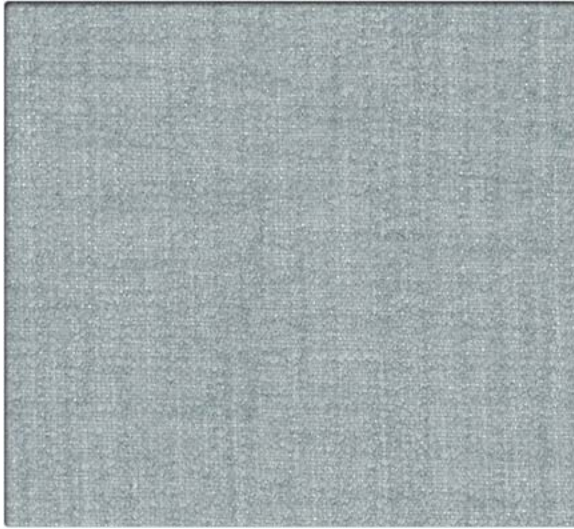

66146 Ariel



66147 Lima

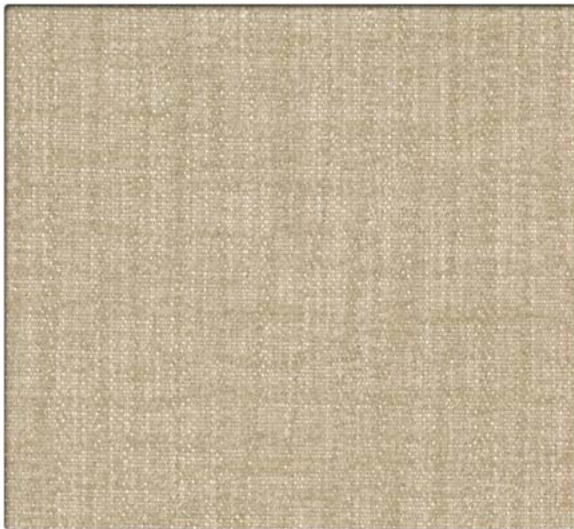


66148 Oat



66149 Shell



66150 Blossom

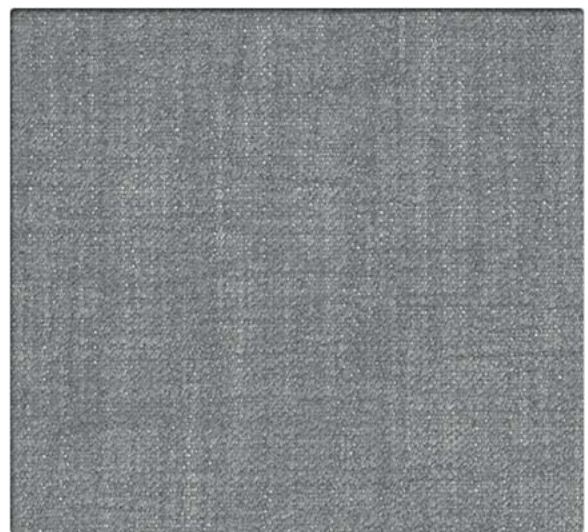

66151 Heron


Click on image to order memo sample.



66152 Holly



66153 Elm

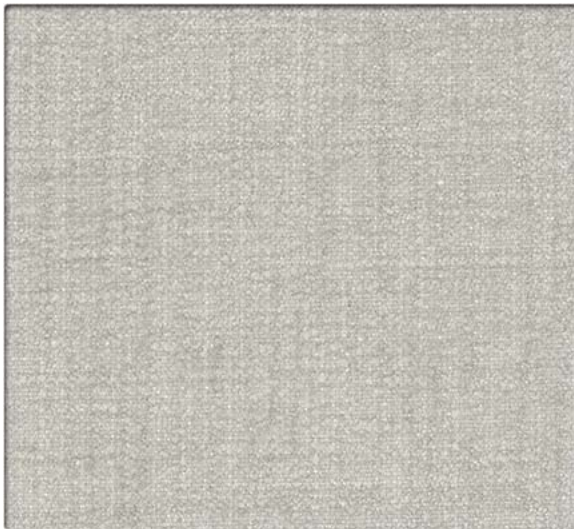

66154 Dove



66155 Tapas



66156 Birdy




66157 Hydra


Click on image to order memo sample.



66158 Ash

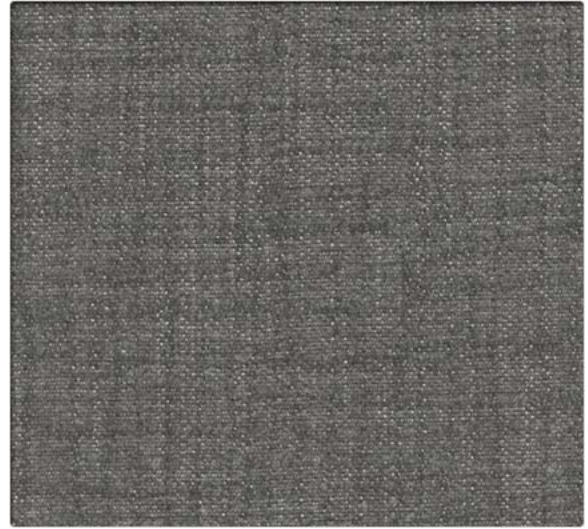

66159 Shoal

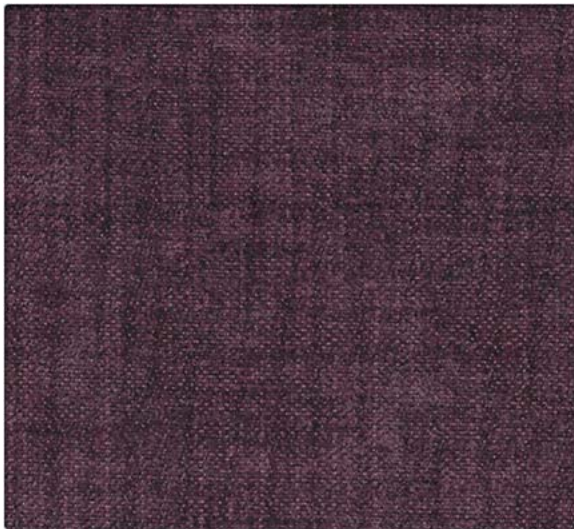


66160 Sultry



66161 Tempest



66162 Navy

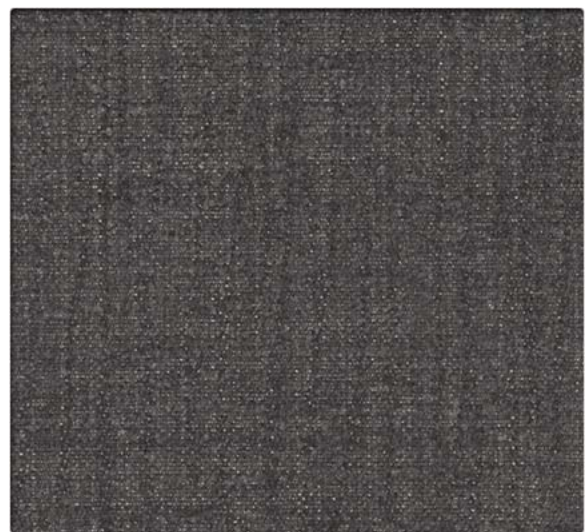


66163 Swift

# Lorelai - MB

Click on image to order memo sample.

PERFORMANCE FABRIC

Grade 6

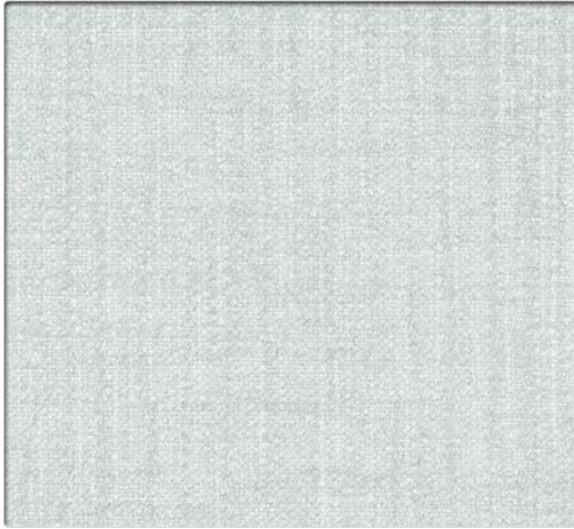

66141 Crystal

# Lorelai - MB

PERFORMANCE FABRIC

Grade 6

## Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- Fluorine Free Repellency
- Fluid barrier
- Bleach-solution cleanable

## Environmental

- GREENGUARD Gold Certified
- LBC Red List Free
- REACH Compliant
- RoHS Compliant
- Healthier Hospitals Compliant
- Non PFOA Stain Resistance
- No fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials

## Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

\* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

\*\* Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

## Specifications



Content	92% Polyester, 6% Polyurethane, 2% Silicone
Finish	Non-PFOA Stain Resistant
Backing	Thermo Bonded High Performance Polyurethane
Weight	22.0 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	55 yards

## Performance Characteristics

Abrasion Resistance** ASTM D-4157	Exceeds 100,000 double rubs - heavy duty
Break Strength ASTM D-5034	Warp: 330 lbs. min., Fill: 145 lbs. min.
Tear Strength ASTM D-2261	Warp: 49.7 lbs. min., Fill: 23.4 lbs. min.
Seam Slippage ASTM D-4034	Warp: 87.5 lbs. min., Fill: 99.5 lbs. min.
Brush Pilling ASTM D-3511	Class 5.0 min.
Colorfastness to Light AATCC-16	40 Hours, Class 4.0
Crocking AATCC-8	Dry: Class 4.5, Wet: Class 4.5
Fluid Barrier	Supreen™ High Performance Integrated Fluid Barrier

## Flammability\*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1



# Stinson®

C.F. Stinson, LLC  
2849 Product Drive  
Rochester Hills, MI 48309

P 800 841 6279  
F 248 299 3884

cfstinson.com