


Satchel

Click on image to order memo sample.

VINYL SEATING

Grade 3

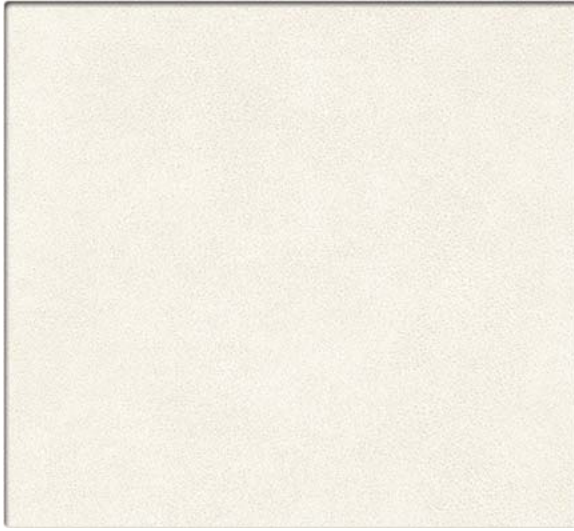


SAT10 Stucco




SAT33 Onyx



SAT12 Marigold

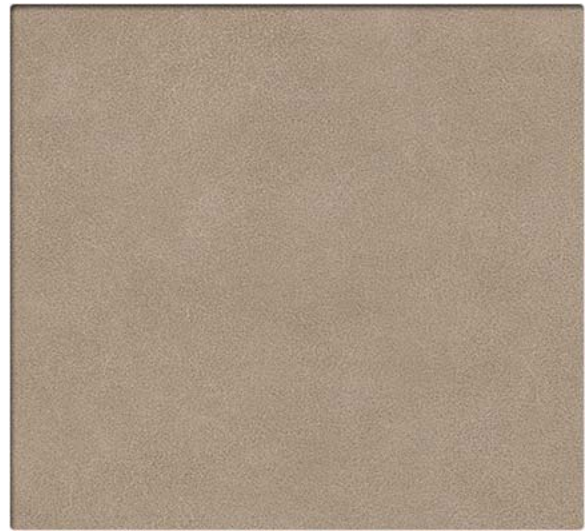

SAT13 Elm

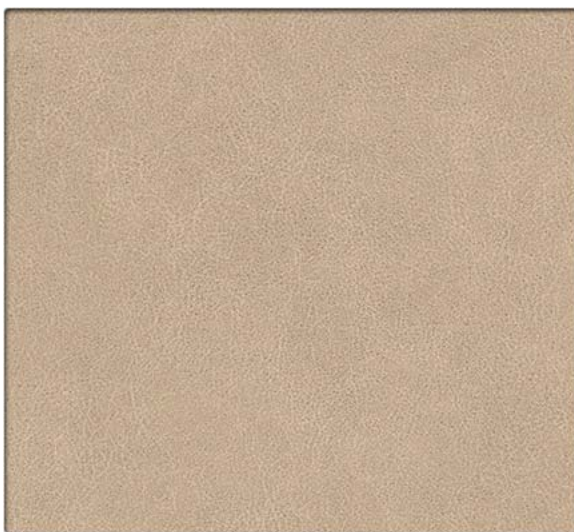

SAT14 Sandstone




SAT15 Cognac

Satchel


VINYL SEATING

Grade 3


Click on image to order memo sample.

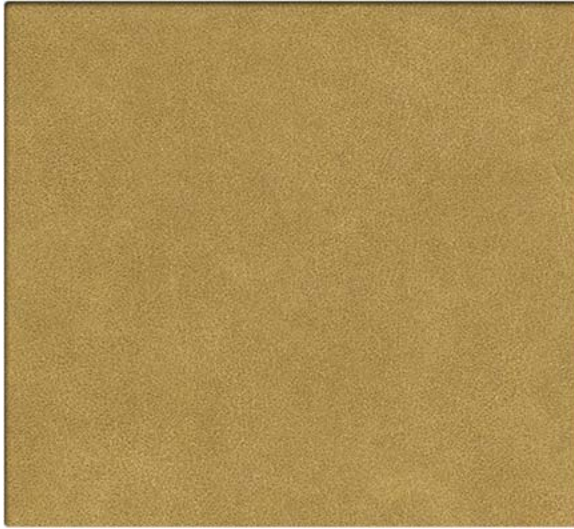

SAT16 Pear

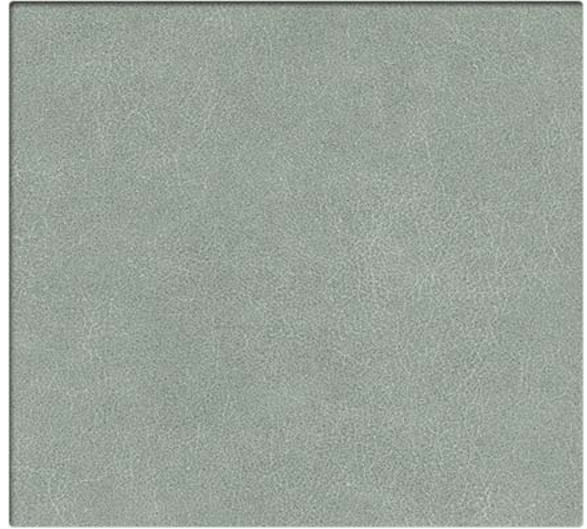

SAT17 Bluestone

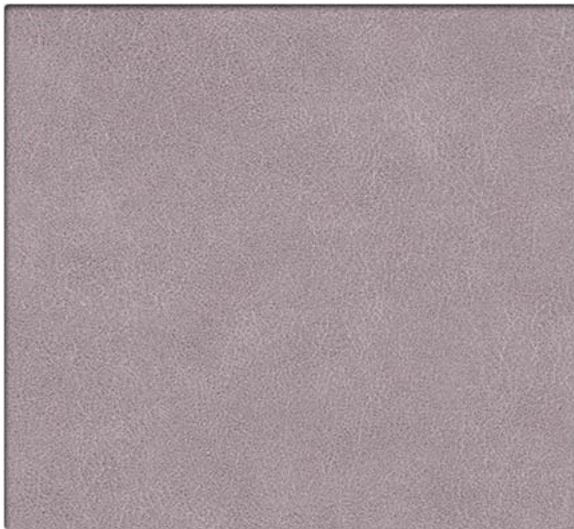

SAT18 Suite



SAT19 Terra Cotta



SAT20 Clay




SAT21 Holly

Satchel


VINYL SEATING

Grade 3


Click on image to order memo sample.

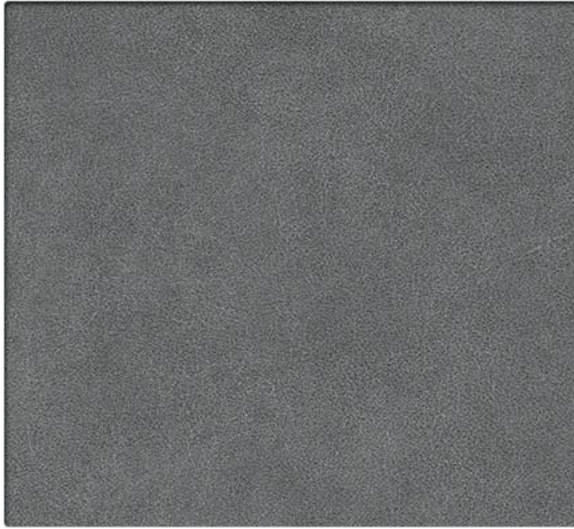


SAT22 Dusk

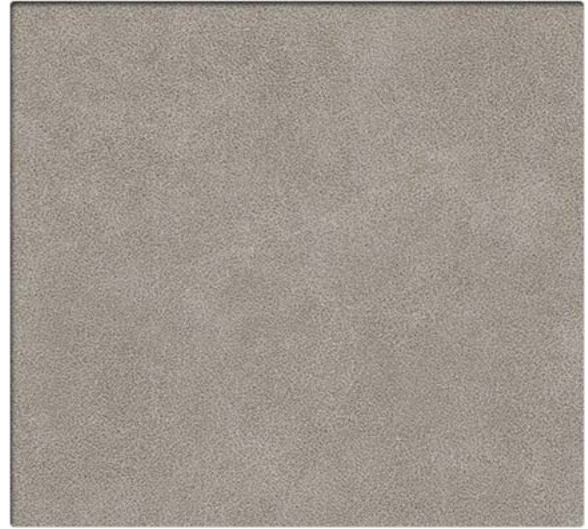

SAT23 Shark

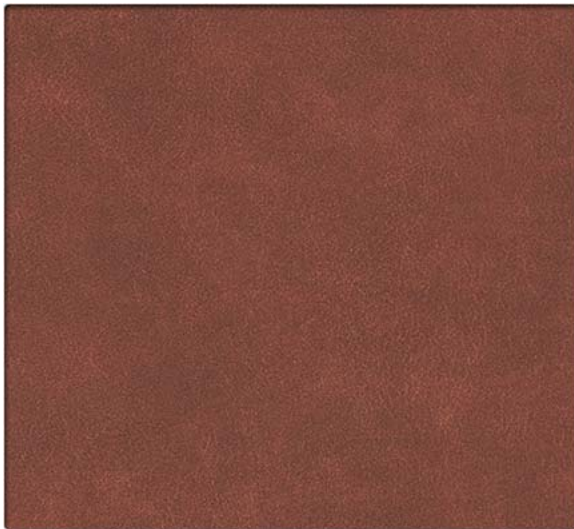

SAT24 Barn

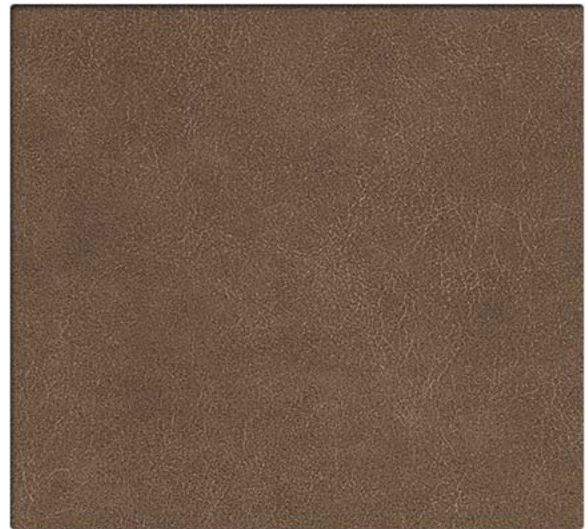

SAT25 Branch



SAT26 Tea




SAT27 Mallard

Satchel


VINYL SEATING

Grade 3


Click on image to order memo sample.

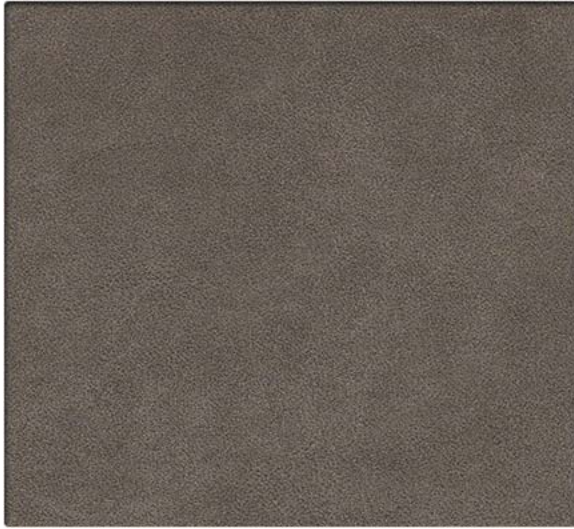

SAT28 Flint

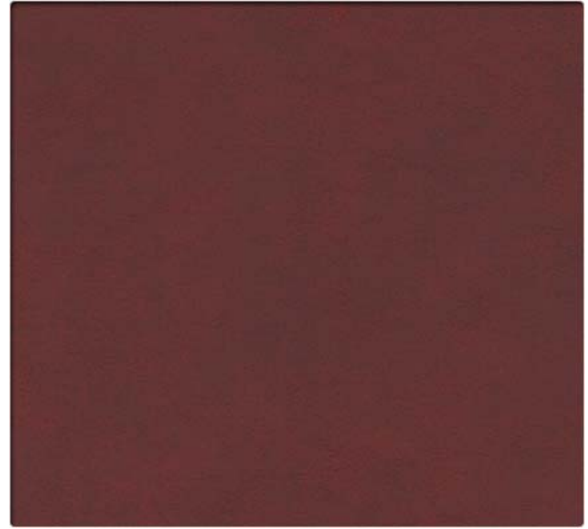


SAT29 Beet

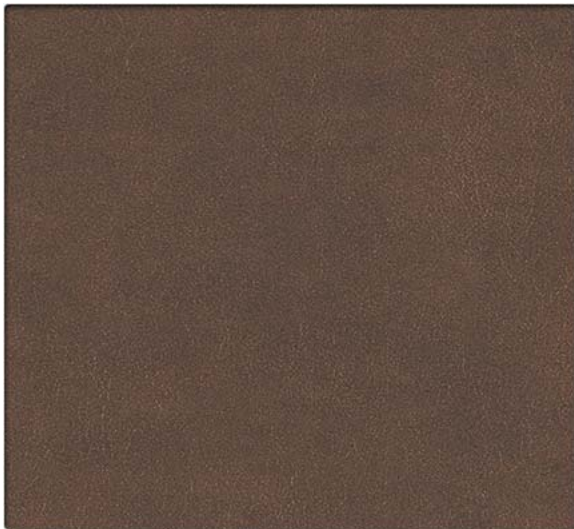


SAT30 Hickory



SAT31 Mesquite

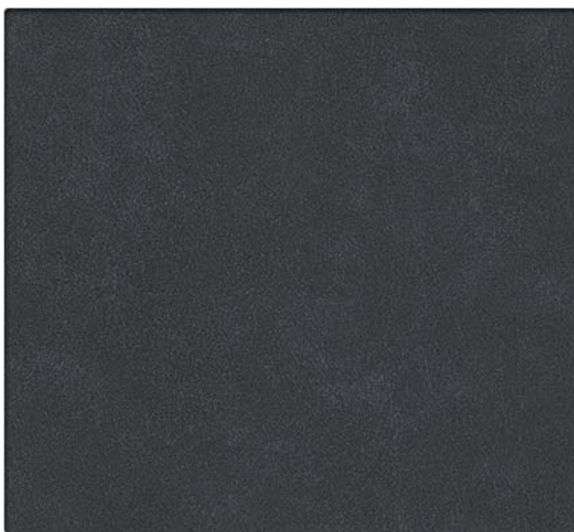

SAT32 Collegiate

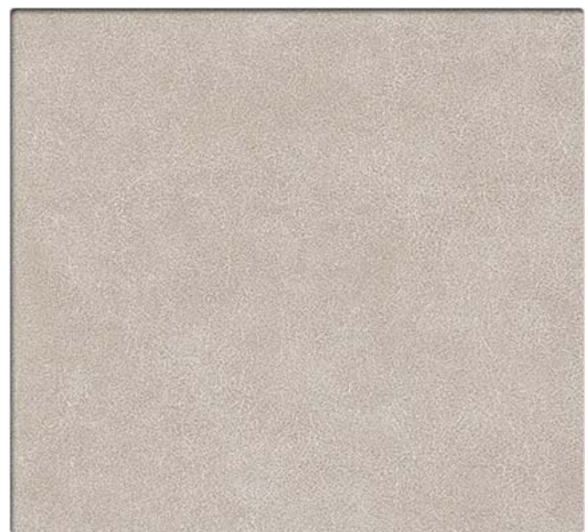

SAT11 Bone

Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- CFFA-Healthcare-201: Certified
- Fluid barrier
- Bleach-solution cleanable
- Enhanced fade resistance

Environmental

- GREENGUARD Certified
- REACH Compliant
- RoHS Compliant
- No fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials
- Does not contain formaldehyde
- Formulated without Phthalates

Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

** Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Specifications



Content	Vinyl Surface with Polyester Backing
Finish	Advanced Soil and Stain Resistant Top Coat
Backing	Polyester
Weight	31.0 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Roll Size	30 yards

Performance Characteristics

Abrasion Resistance** ASTM D-4157	Exceeds 250,000 double rubs - heavy duty
Adhesion ASTM D-751	Warp: 6.3 lbs. min., Fill: 6.3 lbs. min.
Break Strength ASTM D-751-06	Warp: 105 lbs. min., Fill: 92 lbs. min.
Tear Strength ASTM D-751-06	Warp: 6.4 lbs. min., Fill: 7.5 lbs. min.
Seam Slippage ASTM D-751-06	Warp: 54.3 lbs. min., Fill: 42.9 lbs. min.
Colorfastness to Light AATCC-16	300 Hours, Class 3.0
Crocking AATCC-8	Dry: Class 5.0, Wet: Class 5.0
Fluid Barrier	Inherent Fluid Barrier

Flammability*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1
MVSS 302	Passed
MVSS 302	Passed



Stinson®

C.F. Stinson, LLC
2849 Product Drive
Rochester Hills, MI 48309

P 800 841 6279

F 248 299 3884

cfstinson.com