

# Twist


Click on image to order memo sample.




TWT50 Ironwood



TWT51 Rosewood

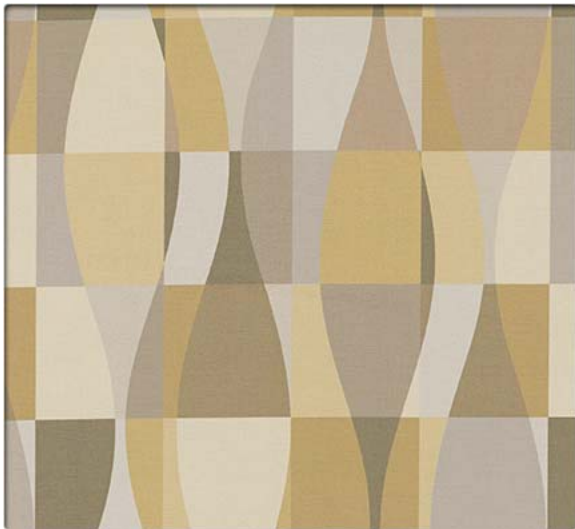

TWT52 Sand Dollar

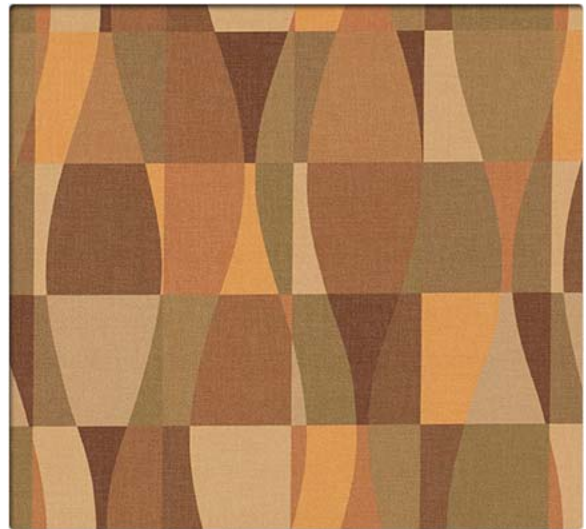

TWT53 Sahara



TWT58 Castlerock



TWT55 Spring

# Twist


Click on image to order memo sample.



TWT56 Oceanside



TWT57 Basil

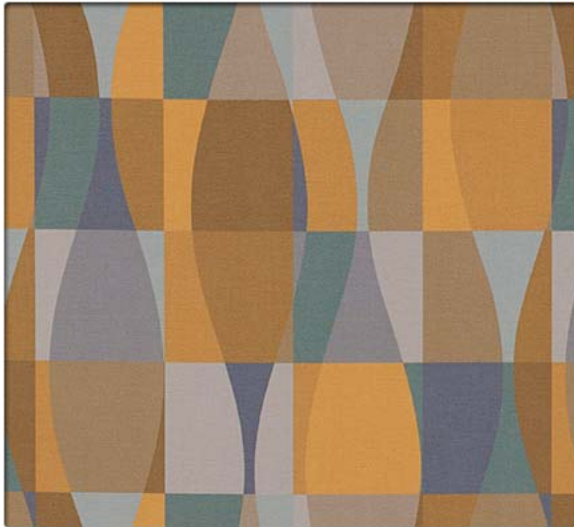

TWT54 Tropic

# Twist

Patty Madden Software

VINYL SEATING

Grade 8

## Performance Summary

- Enhanced soil + stain resistance
- Enhanced abrasion resistance
- CFFA-Healthcare-201: Certified
- Fluid barrier
- Bleach-solution cleanable
- Enhanced fade resistance

## Environmental

- GREENGUARD Certified
- REACH Compliant
- RoHS Compliant
- No fluorocarbons or perfluorinated compounds
- No added flame retardants
- No added antimicrobials
- Formulated without Phthalates

## Cleaning and Maintenance

Cleaning Code: **(W-S)** For water-based stains use water-based cleaners. For oil-based stains use solvent-based cleaners. We recommend using a professional cleaning service.

Bleach solutions of up to 10% may be used for more difficult stains.

Dye lots may vary slightly.

\* This term and any corresponding data refer to the typical performance in the tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

\*\* Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

## Specifications



Content	Vinyl Surface with Polyester Backing
Finish	Zeron® Protective Finish
Backing	Polyester Fabric
Weight	30.0 oz./lin. yd. ± 1.0 oz.
Width	54 inches
Repeat	Horizontal: 8.75 inches, Vertical: 9.125 inches, directional
Roll Size	30 yards

## Performance Characteristics

Abrasion Resistance** ASTM D-4157	Exceeds 100,000 double rubs - heavy duty
Break Strength CFFA-17	Warp: 121 lbs. min., Fill: 72 lbs. min.
Tear Strength CFFA-16	Warp: 18 lbs. min., Fill: 18 lbs. min.
Colorfastness to Light CFFA-2	1000 Hours, Class 5.0
Crocking CFFA-7	Dry: Class 5.0, Wet: Class 5.0
Fluid Barrier	Inherent Fluid Barrier

## Flammability\*

California Technical Bulletin 117-2013 Section 1	Passed
UFAC	Class 1
NFPA 260	Class 1



# Stinson®

C.F. Stinson, LLC  
2849 Product Drive  
Rochester Hills, MI 48309

P 800 841 6279  
F 248 299 3884

cfstinson.com